



HORNOS DE CÁMARA ESTÁNDARES


CWF

www.carbolite.com/es/productos/hornos-de-camara/hornos-de-laboratorio/cwf/

CWF

HORNOS DE CÁMARA ESTÁNDARES

Los hornos de cámara de uso general de la serie CWF son aparatos de sobremesa para el laboratorio. Estos se ofrecen en cinco tamaños distintos y con una temperatura máxima de operación de 1300 °C.

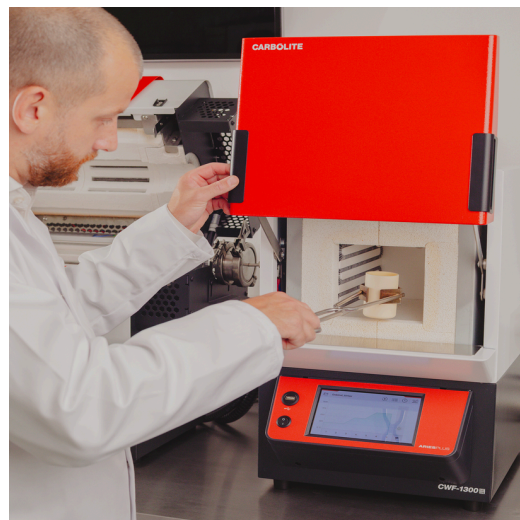

CWF

EQUIPAMIENTO ESTÁNDAR

- | Temperaturas máximas 1100 °C, 1200 °C y 1300 °C
- | Cámaras de 5, 13, 23, 36 y 65 litros
- | Programmable EPC3016P1 controller
- | Puerta que se eleva en paralelo a la cámara de trabajo protegiendo al usuario del aislamiento caliente
- | Soft closing door on 5, 13 & 23 litre models protects the thermal insulation
- | Placa de resistencias de alúmina resistente, entrada y solera del horno
- | Aislamiento de fibra de alta calidad con baja masa térmica
- | Resistencias potentes en los laterales que garantizan una gran uniformidad de temperatura
- | Resistencias y controles de cómodo acceso para un mantenimiento más fácil

CWF


EQUIPAMIENTO / OPCIONES / ACCESORIOS

- | A range of sophisticated digital controllers, multisegment programmers and data loggers with digital communication options is available - more information about controllers
- | Over-temperature protection (recommended to protect valuable contents & for unattended operation)
- | A range of metallic retorts to work with modified atmospheres up to 1100°C
- | Bespoke specifications are available for AMS2750H (Nadcap) compliant applications


CWF

ATMOSPHERE RETORTS FOR CWF FURNACES

A retort can be used for various heat treating processes requiring a controlled inert or reactive atmosphere, e.g. to prevent oxidation or to enhance surface hardness. The A105 retort, which incorporates a silicone rubber seal, can achieve low oxygen levels. Manufactured in either NiCr alloy (Inconel) with a maximum operating temperature of 1100 °C or 314 grade stainless steel with a maximum operating temperature of 1050 °C.

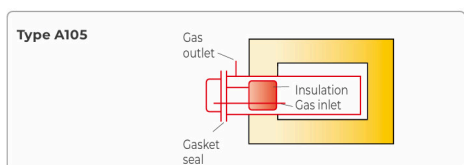


The A105 retort is sealed by a removable front opening insulated door fitted with a silicone rubber seal. Gas inlet and outlet connections are easily accessible at the front. Oxygen levels down to 30 ppm are achievable. A105 retorts for CWF furnaces are fitted with a 3 mm thermocouple gland through the centre of the door. The retort and furnace must be ordered together as the furnace is modified to allow it to be used with, and without, the retort. The A105 retort can be used in combination with the laboratory gas safety system for safe use with hydrogen.

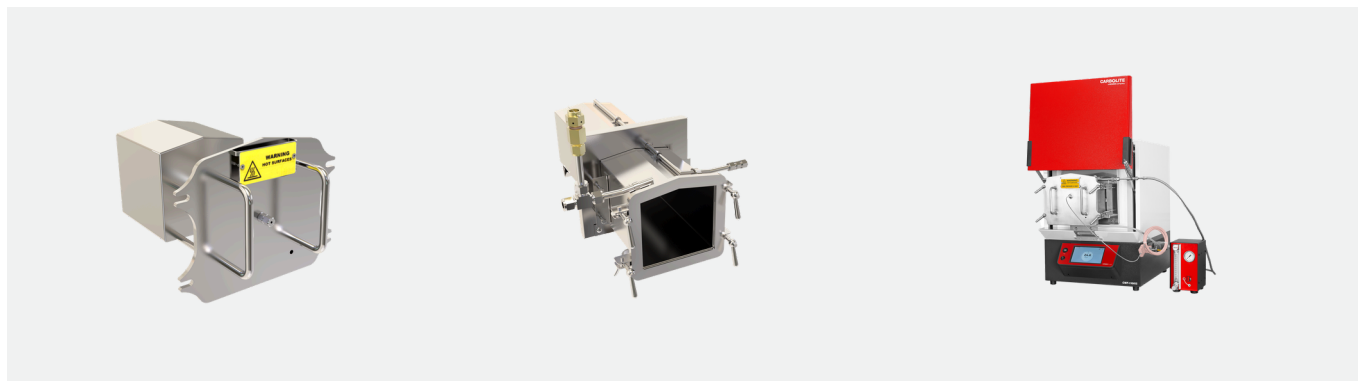

CWF

A105 DIMENSIONES INTERNAS

CG H Model	Height h/H [mm]	Width W h/H [mm]	Depth [mm]	Door type
CWF_/13	135/150	150	275	pull out
CWF_/23	170/185	195	350	pull out
CWF 12/36	180/200	270	400	pull out
CWF 12/65	200/225	335	540	pull out



CWF

EJEMPLOS



CWF 13/65 con controlador de temperatura nanodac



CWF 13/36 con controlador de temperatura AriesPlus

CWF

DATOS TÉCNICOS

MODELOS DE 1100 °C

Especificación	CWF 11/5	CWF 11/13	CWF 11/23
Temp. máx. (°C)	1100	1100	1100
Tiempo de calentamiento (min)	47	76	36
Temperatura máxima de operación continuo (°C)	1000	1000	1000
Medidas: interior H x A x F (mm)	135 x 140 x 250	200 x 200 x 325	235 x 245 x 400
Medidas: exterior H x A x F (mm)	595 x 375 x 495	670 x 435 x 608	715 x 505 x 680
Medidas: exterior, con puerta abierta, H X A x F (mm)	810 x 375 x 540	915 x 435 x 675	1000 x 505 x 765
Zona de temperatura homogénea (± 5 ° C) A x H x F (mm)	85 x 90 x 110	120 x 120 x 185	155 x 165 x 285
Volumen de cámara (litros)	5	13	23
Potencia máx. (W)	2400	3100	7000
Potencia mantenim. (W)	790	1500	1900
Termopar tipo	R	R	R
Peso (kg)	30	47	68

CWF

DATOS TÉCNICOS

MODELOS DE 1200 °C

Especificación	CWF 12/5	CWF 12/13	CWF 12/23	CWF 12/36	CWF 12/65
Temp. máx. (°C)	1200	1200	1200	1200	1200
Tiempo de calentamiento (min)	51	88	45	37	40
Temperatura máxima de operación continuo (°C)	1100	1100	1100	1100	1100
Medidas: interior H x A x F (mm)	135 x 140 x 250	200 x 200 x 325	235 x 245 x 400	250 x 320 x 450	278 x 388 x 595
Medidas: exterior H x A x F (mm)	595 x 375 x 495	670 x 435 x 608	715 x 505 x 680	810 x 690 x 780	885 x 780 x 945
Medidas: exterior, con puerta abierta, H X A x F (mm)	810 x 375 x 540	915 x 435 x 675	1000 x 505 x 765	1105 x 690 x 780	1245 x 780 x 945
Zona de temperatura homogénea (± 5 ° C) A x H x F (mm)	85 x 90 x 125	120 x 120 x 200	155 x 165 x 325	170 x 240 x 357	178 x 288 x 455
Volumen de cámara (litros)	5	13	23	36	65
Potencia máx. (W)	2400	3100	7000	9000	14000
Potencia mantenim. (W)	850	1550	2250	--	--
Termopar tipo	R	R	R	R	R
Peso (kg)	30	47	68	100	165

CWF

DATOS TÉCNICOS

MODELOS DE 1300 °C

Especificación	CWF 13/5	CWF 13/13	CWF 13/23	CWF 13/36	CWF 13/65
Temp. máx. (°C)	1300	1300	1300	1300	1300
Tiempo de calentamiento (min)	75	121	55	47	55
Temperatura máxima de operación continuo (°C)	1200	1200	1200	1200	1200
Medidas: interior H x A x F (mm)	135 x 140 x 250	200 x 200 x 325	235 x 245 x 400	250 x 320 x 450	278 x 388 x 595
Medidas: exterior H x A x F (mm)	595 x 375 x 495	670 x 435 x 608	715 x 505 x 680	810 x 690 x 780	885 x 780 x 945
Medidas: exterior, con puerta abierta, H X A x F (mm)	810 x 375 x 540	915 x 435 x 675	1000 x 505 x 765	1105 x 690 x 780	1245 x 780 x 945
Zona de temperatura homogénea ($\pm 5^\circ\text{C}$) A x H x F (mm)	85 x 90 x 150	120 x 120 x 225	155 x 165 x 340	170 x 240 x 400	178 x 288 x 255
Volumen de cámara (litros)	5	13	23	36	65
Potencia máx. (W)	2400	3100	7000	9000	14000
Potencia mantenim. (W)	1000	1800	2500	--	--
Termopar tipo	R	R	R	R	R
Peso (kg)	30	47	68	100	165

CWF

CONTACTO →

www.carbolite.com/es/contact-services/contact-form/?prefilltext=contact_form.request&product=C-2-UCF-B

PEDIR UN PRESUPUESTO →

www.carbolite.com/es/contact-services/contact-form/?prefilltext=contact_form.quote_request&product=C-2-UCF-B



CARBOLITE®
a **VERDER** company

www.carbolite.com/es/productos/hornos-de-camara/hornos-de-laboratorio/cwf/